REBAR HUB TO BE LEFT IN CONCRETE

CODE	REFERENCE	A (mm)	L (mm)	D (mm)	PACKAGE	
					QTY	UNIT
1200080040	8 x 40	08	40	50	1.000	Piece
1200100040	10 x 40	10	40	50	1.000	Piece
1200120030	12 x 30	12	30	50	1.000	Piece
1200120040	12 x 40	12	40	50	1.000	Piece
1200140040	14 x 40	14	40	50	1.000	Piece

It is implemented in reinforced concrete wall molds in a way that it will be in contact with both the structural iron and the formwork. It is tightened with formed spring clamp and removed from the concrete when the concrete is poured and the mold is obtained.

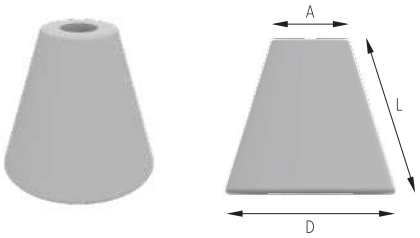

TIE ROD TAP

CODE	REFERENCE	HOLE DIA Ø (mm)	HOLE OUTER DIA Ø (mm)	PACKAGE	
				QTY	UNIT
1300252025	25mm Stopper Cap	20	25	2.000	Piece
1300322832	32mm Stopper Cap	28	32	1.000	Piece

It is the cap that prevents the leakage of cement slurry into the casing pipe of the Tie-rod that is used to stabilize the distance between the reinforced concrete blade column and the beam molds. It also has a special tap that covers the gap at the end.

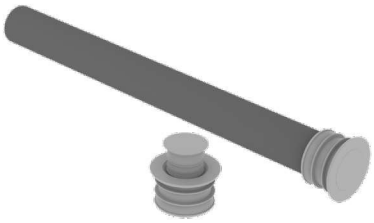

WATER STOPPER CAP

CODE	REFERENCE	D (mm)	L (mm)	d (mm)	PACKAGE	
					QTY	UNIT
1350250021	Reduction	25	30	21	2.000	Piece

In reinforced concrete water structures a special type of Tie-rod is installed bilaterally in two sides of the nodular cast iron water stopper equipment, thus reinforcing the mold. Outside of the Tie-rod within the mold there is also a protective pipe. And these are the connecting parts that links the protective pipe to the water stopper equipment.

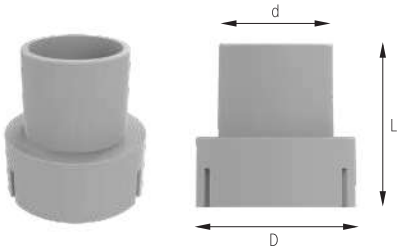

TIE ROD CONE

CODE	REFERENCE	HOLE DIA Ø (mm)	HOLE OUTER DIA Ø (mm)	PACKAGE	
				QTY	UNIT
1450221622	18-22	18	22	3.000	Piece
1450251925	22-25	22	25	2.000	Piece
1450252225	25 (L:400)	22	25	2.000	Piece
1450302630	26-30	26	30	1.000	Piece
1450322832	28-32	28	32	1.000	Piece
1450363236	32-36	32	36	1.000	Piece
1450342020	25 (Tie Rod Cone Plug)	20	-	1.000	Piece

It is the cap that prevents the leakage of cement slurry into the casing pipe of the Tie-rod that is used to stabilize the distance between the reinforced concrete blade column and the beam molds. Like it can be covered with its special tap, it is also possible to remove and reutilize them.